






Lyft & Surrningsredskap AB

Cable snap and Mini Cable

2016-04



	Mini Cable®	Cable snap®	Cable snap® Stainless
Article	2XCA2010	2XIA40010	2XIA40010R
Complete product	Breaking load 6 kN (lashing strength)	Breaking load 40 kN (lashing strength)	Breaking load 30 kN (lashing strength)
House			
- Material	Zamak 2	Steel	Stainless steel
- Treatment	Yellow cremated	Black Epoxy coated	Dacromet® grade B
Spring			
- Material	Stainless spring steel AISI 304	Stainless spring steel SS 2331-06	Stainless spring steel SS 2331-06
Axel			
- Material	Stainless steel AISI 304	Steel	Steel
Webbing			
- Material	100 % polyester(PES)	100 % polyester(PES)	100 % polyester(PES)
- Breaking load	15 kN	26 kN	26 kN
- Width	25 mm	47 mm	47 mm

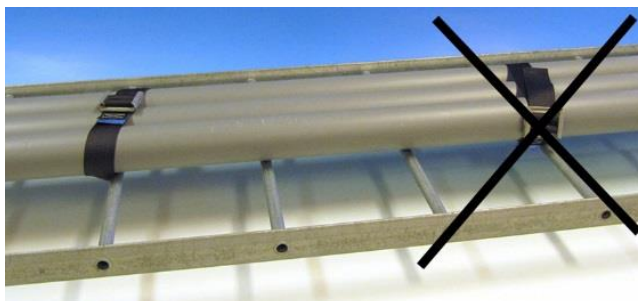

Tested by Det Norske Veritas

ADRESS/ ADDRESS	TELEFON/ TELEPHONE 0303-24 66 50 +46 303 24 66 50	E-MAIL mail@lyfta.se	ORG.NR 556198-8907	PLUSGIRO 4382694-0	BANK Swedbank
Traktorgatan 20 SE-442 40 KUNGÄLV Sweden	TELEFAX 0303-941 09 +46 303 941 09	HEMSIDA www.lyfta.se	VAT.NO SE556198890701	BANKGIRO 697-1303	SWIFT SWEDESS IBAN SE1680000810590032067514
					ACCOUNT NO: 8105-9.32067514